
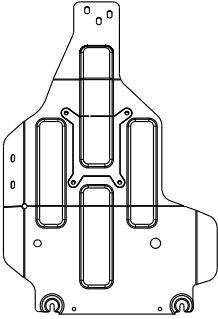
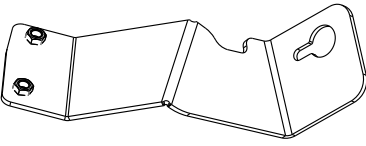
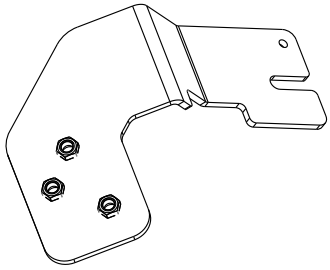
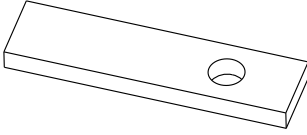
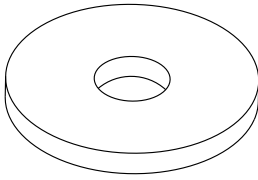









JEEP Wrangler 2,0 AT AWD

2018 - 


SKID PLATE FOR FOR ENGINE BAY Installation Instructions JEEP Wrangler

<div style="display: flex; justify-content: space-between; align-items: center;"> A Skid plate </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="display: flex; justify-content: space-between;"> Main part X1 </div>	<div style="display: flex; justify-content: space-between; align-items: center;"> B Bracket </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: right; margin-top: 10px;"> X1 </div>	<div style="display: flex; justify-content: space-between; align-items: center;"> C Bracket </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: right; margin-top: 10px;"> X1 </div>
<div style="display: flex; justify-content: space-between; align-items: center;"> D ND 3009 </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: right; margin-top: 10px;"> X4 </div>	<div style="display: flex; justify-content: space-between; align-items: center;"> E ND 7001 </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: right; margin-top: 10px;"> X1 </div>	<div style="display: flex; justify-content: space-between; align-items: center;"> F M10 x 20 Bolt </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: right; margin-top: 10px;"> X4 </div>
<div style="display: flex; justify-content: space-between; align-items: center;"> G Ø10 Washer </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: right; margin-top: 10px;"> X12 </div>	<div style="display: flex; justify-content: space-between; align-items: center;"> H M10 x 30 Bolt </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: right; margin-top: 10px;"> X8 </div>	<div style="display: flex; justify-content: space-between; align-items: center;"> I M10 x 40 Bolt </div> <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: right; margin-top: 10px;"> X1 </div>



Tools Required:




Ratchet with extension cord

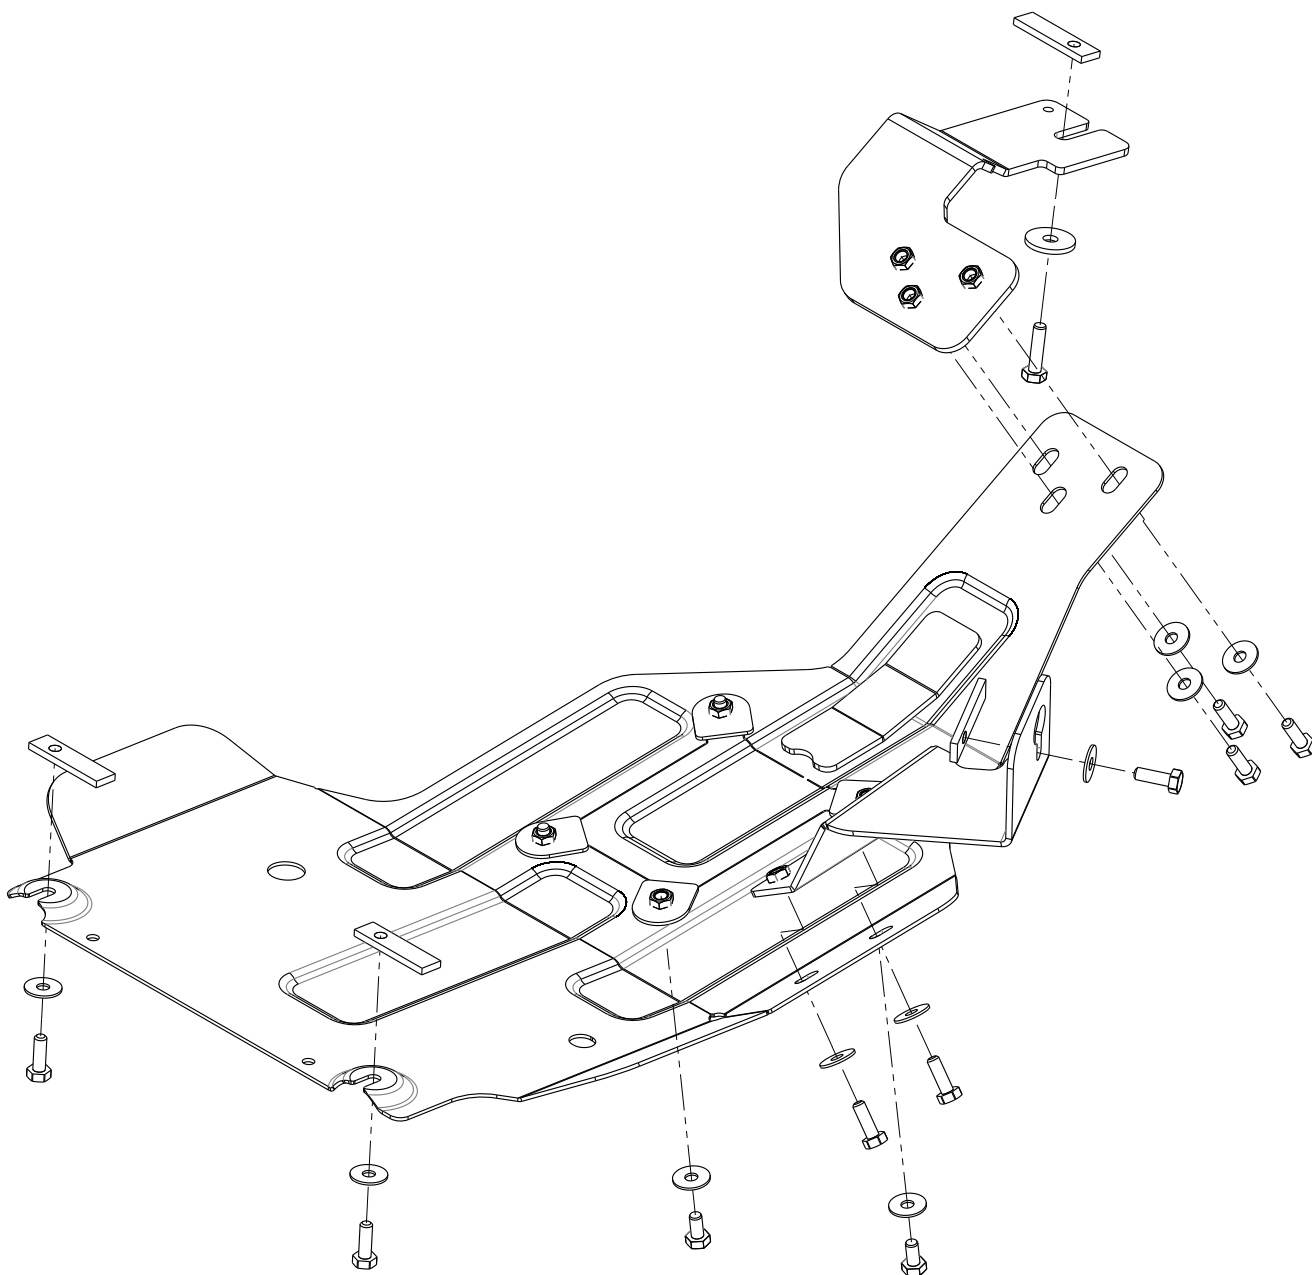


- 1** Screw the bolt M10x40 (I) and ND 7001 (E) into the ND 3009 (D) not completely. Put ND 3009 (D) into the crossbeam through the central hole. Install the bracket (C) on the received mounting point.

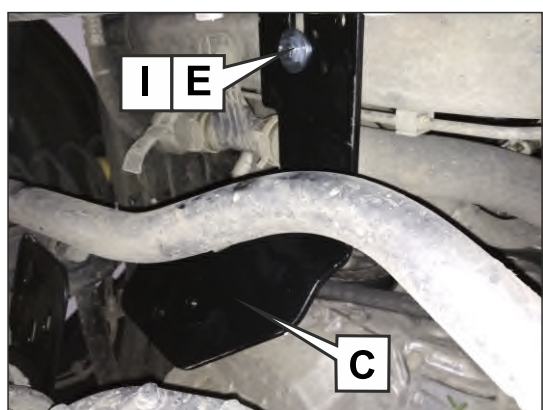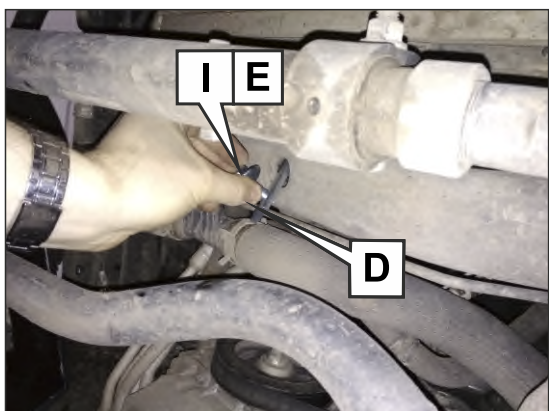



- 2** On the outside right side of the frame insert the ND 3009 (D) and install the bracket (B) with the bolt M10x30 (H) and washer $\varnothing 10$ (G).

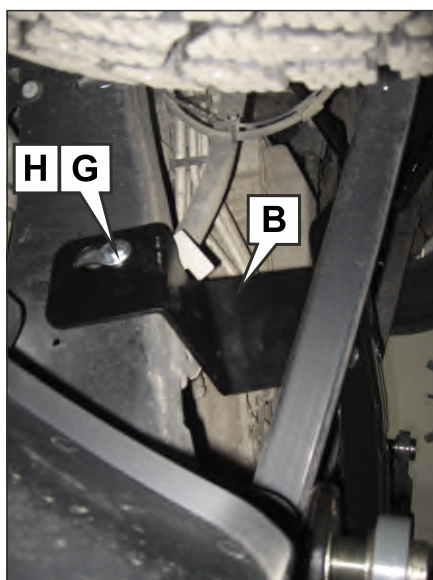

- 3** Install the NDs 3009 (D) in the transverse beam under the gearbox, which has many holes, as shown in the picture. Screw the bolts M10x30 (H) and washers Ø10 (G) into the hreaded holes of NDs' 3009 (D) not completely.

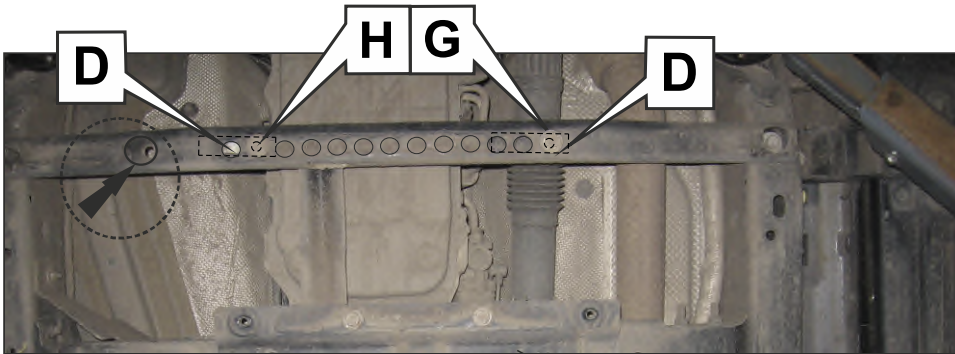

- 4** Set the skid plate (A) on the obtained attachment points (the brackets (B), (C) and the bolts M10x30 (H) with washers Ø10 (G)) with the bolts M10x30 (H), M10x20 (F) and washers Ø10 (G), as shown in the picture.

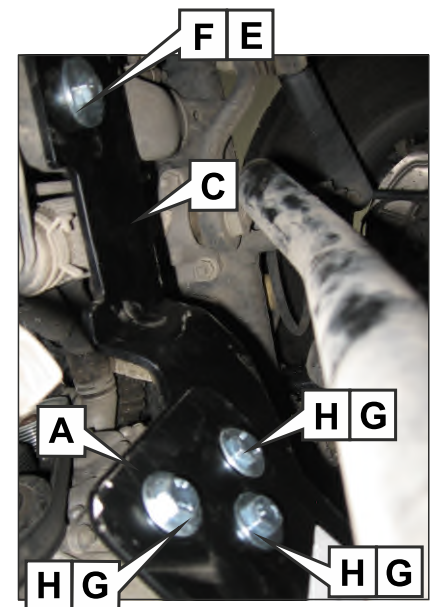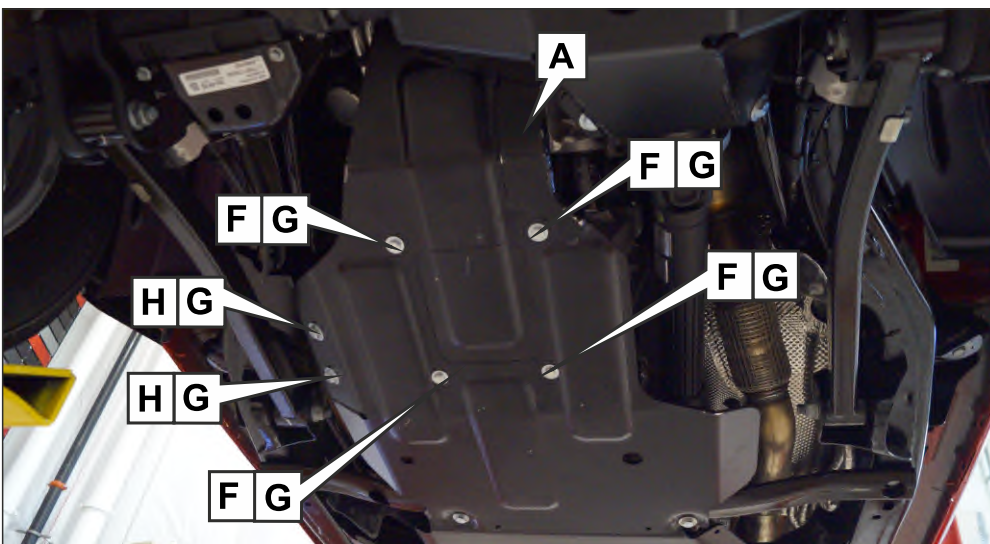

Engine bay and transmission elements skid plate has been designed and manufactured by LLC Metalloproduksia. Product conforms to TOR 4591-001-25888788-2006 requirements. Product design is protected by model copyright certificates №89059, 15980, 15981, 15982, 15983. Patented in Russian Federation.

INSTALLATION:

Engine bay and transmission elements skid plate has been designed particularly for a certain vehicle. It should be mounted according to the producer's installation instruction by a dedicated dealer or on certified service stations. The skid plate is fixed to regular apertures located on vehicle's body load-bearing elements. In case of correct installation the skid plate should not interfere with any vehicle's units and components.

OPERATING CONDITIONS:

Engine bay and transmission elements skid plate has been designed to operate in conditions specified by vehicle's producer. Cases of crush or driving into obstacles at a speed should be excluded during exploitation. In case of head-on crush it is necessary to assure in absence of damages of vehicle's components and units and availability of roadworthiness on certified service stations.

WARRANTY:

Warranty period - 12 months.

WARRANTY TERMS:

The skid plate should be installed on a vehicle with undamaged body and load-bearing elements (vehicle, which has never been involved in road traffic accident);

There are no mechanical damages of the skid plate resulting from head-on crush. All requirements to skid plate installation should be satisfied;

There are no mechanical damages of powder coating.

Producer does not bear liability for damages caused to the vehicle, health and life of people in case of installation and exploitation terms violation. Producer has a right to introduce changes into the skid plate construction.

ENVIRONMENTAL PROTECTION

Dispose of packaging properly. It is recommended to take it for recycling. Don't forget about environmental protection.

