


FIAT Stilo

Body: Years.:1999 -; V: 1,8; TYPE : 07.472
VIN:-



1. Remove OE duster
2. Disassemble the skid plate to the component parts.
3. Fix beam (1) over welding joint in the front of front axle beam.
4. Fix the skid plate's frame to lugs located on the front axle beam with bolts M 10x30 and threaded inserts (65x20x20).
5. Fix the front part of the skid plate to mounted beam (1) with bolts M 10x60.
6. Fix the main part of the skid plate to mounted frame with bolts M 8x30 and in the front with bolts M 10x20.
7. Tighten all screw joints.

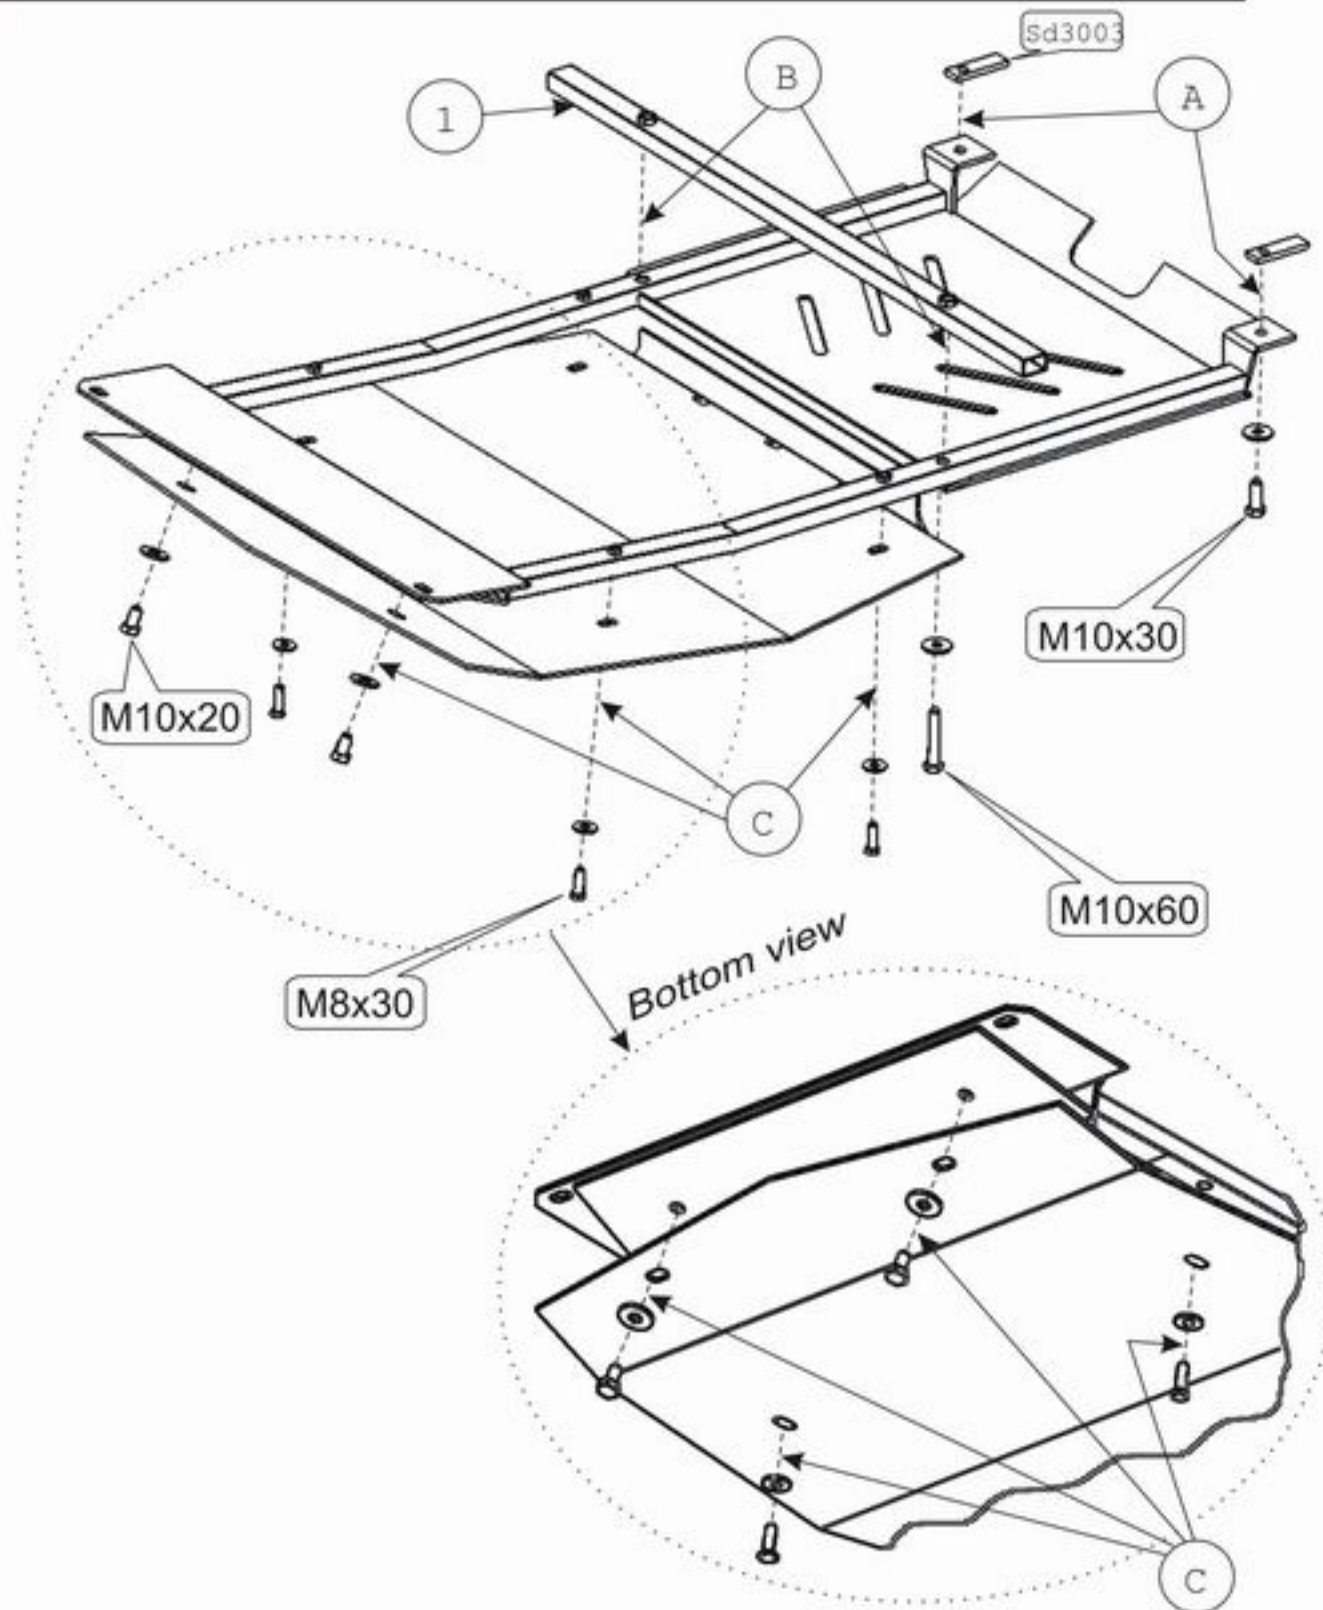