

**METALLOPRODUKTSIA**

Installation manual

Model: Mercedes-Benz Sprinter

Skid plate for: engine bay and transmission case

Article: 13.2770

Body type:

Years: 2013 -

Engine type: 2,2 TD MT 4wd

Engine bay and transmission elements skid plate has been designed and manufactured by LLC Metalloproduktzia. Product conforms to TOR 4591-001-25888788-2006 requirements. Product design is protected by model copyright certificates №89059, 15980, 15981, 15982, 15983. Patented in Russian Federation.

APPLICATION:

Protection of engine bay and transmission elements from mechanical deformation.
Protection of engine bay and transmission elements from dust and damp.

INSTALLATION:

Engine bay and transmission elements skid plate has been designed particularly for a certain vehicle. It should be mounted according to the producer's installation instruction by a dedicated dealer or on certified service stations. The skid plate is fixed to regular apertures located on vehicle's body load-bearing elements. In case of correct installation the skid plate should not interfere with any vehicle's units and components.

INSTALLATION MANUAL:

1. To remove the standard plate front axle beam and install in its place a beam "B".
2. Fix the brackets "2" between the pipes of the central beam.
3. Front, in regular mounting apertures of longerons fix threaded inserts "3" and install them on the wings of "1".
4. Screw the mounting bolts M10x20 in the beam "B".
5. Install created at the point the front part of the skid plate "A", join with wings.
6. Install created at the point of the rear part of the skid plate "C", attaching it to the bracket "2".
7. Tighten all screw joints.

OPERATING CONDITIONS:

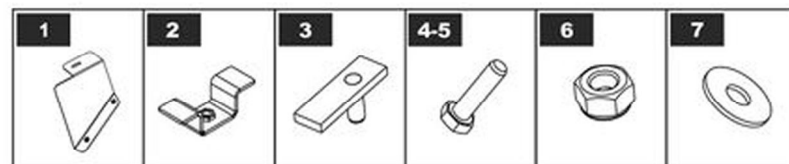
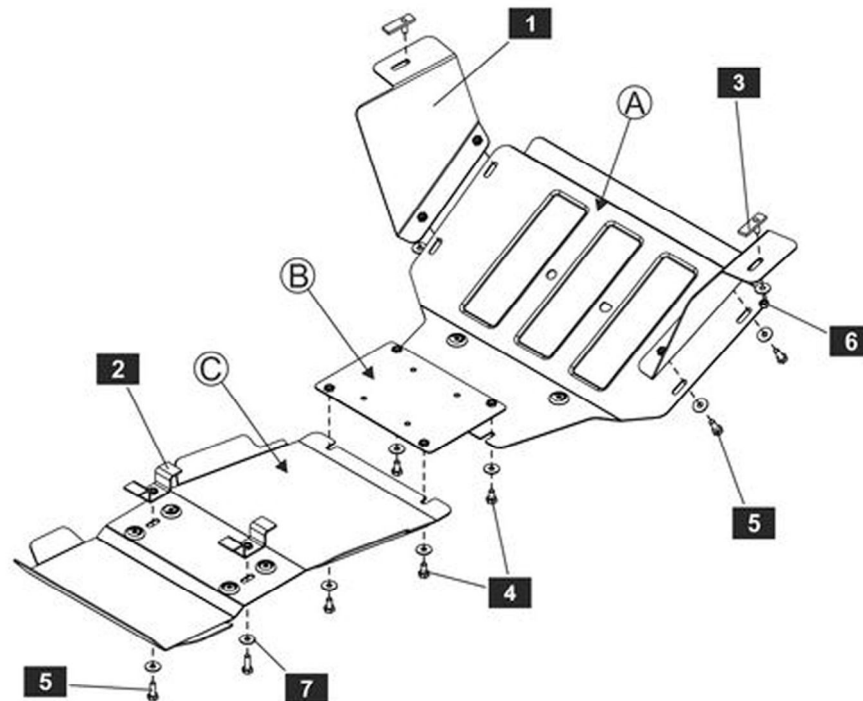
Engine bay and transmission elements skid plate has been designed to operate in conditions specified by vehicle's producer. Cases of crush or driving into obstacles at a speed should be excluded during exploitation. In case of head-on crush it is necessary to assure in absence of damages of vehicle's components and units and availability of roadworthiness on certified service stations.

WARRANTY:

Warranty period - 24 months.

WARRANTY TERMS:

The skid plate should be installed on a vehicle with undamaged body and load-bearing elements (vehicle, which has never been involved in road traffic accident);
There are no mechanical damages of the skid plate resulting from head-on crush. All requirements to skid plate installation should be satisfied;
There are no mechanical damages of powder coating.
Producer does not bear liability for damages caused to the vehicle, health and life of people in case of installation and exploitation terms violation. Producer has a right to introduce changes into the skid plate construction.

**LIST OF PARTS**

| NO. | NAME | QTY. | NO. | NAME | QTY. |
|-----|-----------------|------|-----|-------------|------|
| 1 | Wing | 2 | 5 | Bolt M10x30 | 6 |
| 2 | Bracket | 2 | 6 | Nut M10 | 2 |
| 3 | Threaded insert | 2 | 7 | Washer 10 | 12 |
| 4 | Bolt M10x20 | 4 | 8 | | |

| | | | | |
|-------------------|--------|---------|---------|----------|
| Thread | M6x1.0 | M8x1.25 | M10x1.5 | M12x1.75 |
| Tightening torque | 9.8 Nm | 24.0 Nm | 47.0 Nm | 81.0 Nm |