

Mitsubishi Pajero Pinin


Bj. 1999-

Art. 14.0560

1. Disassemble the skid plate to component parts

2. Remove regular dust guard.


3. Insert strap Sd3003 into the apertures in the front axle beam.

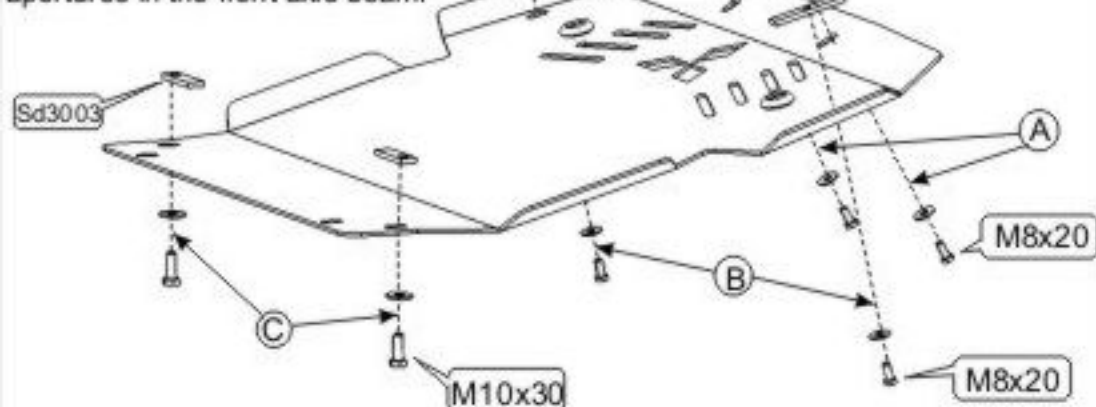


4. Fix the front part of the skid plate to regular fixing points with bolts M 8x20 -(A).

5. Fix the middle part of the skid plate to the rod's corbels with bolts M 8x20 and straps Sd3006 -(B).

6. Fix the rear part of the skid plate to straps mounted on the front axle beam with bolts M 10x30 - (C).

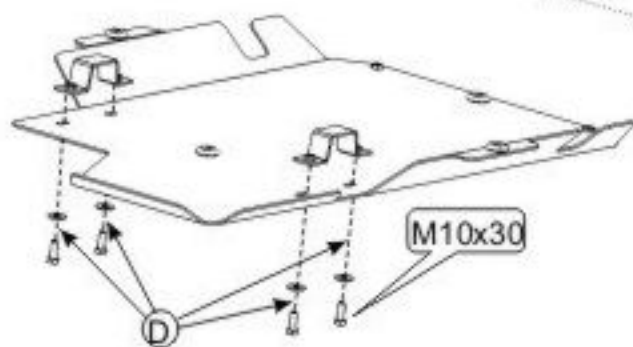

7. Fix corbels to the transmission case supporting crossbar.

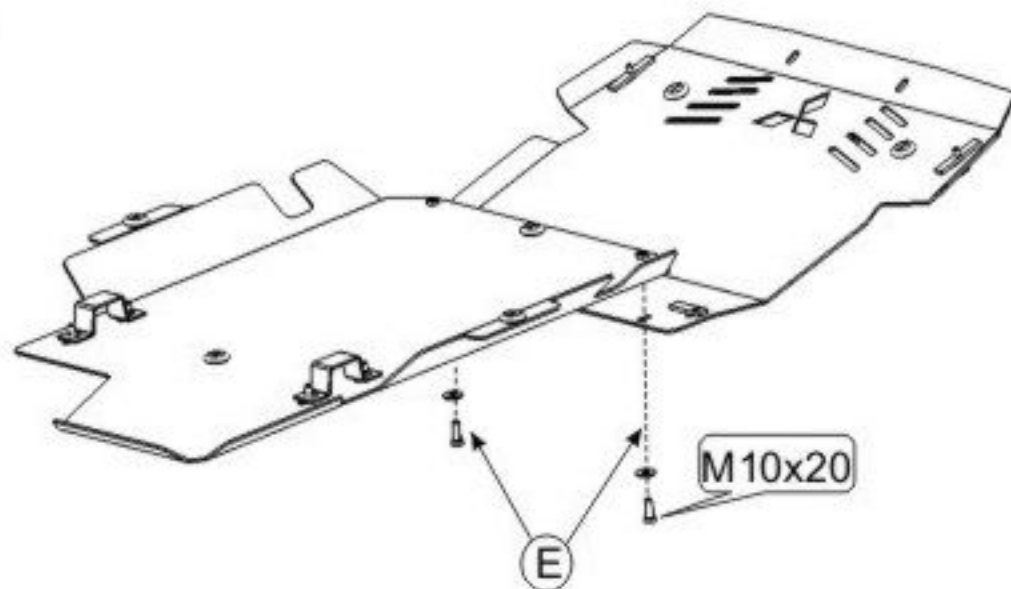

8. Put the second part of the skid plate over the first part and fix it to corbels with bolts M10x30 -(D).

9. Join both parts with bolts M10x20 -(E).

10. Tighten all screw joints.

