
Mitsubishi Outlander

Years: Body.: 2006-; V: 2,4

VIN:- MT Type: 14.1102



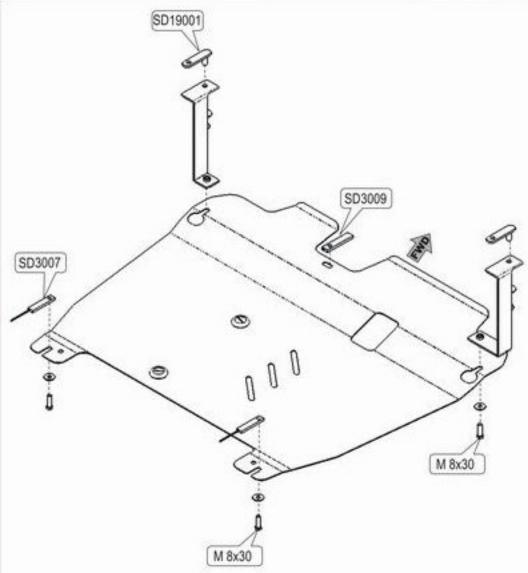

- Remove the rear part of the OE duster.
- Fix corbels to apertures in longerons. Lower apertures of these corbels shall coincide with apertures in duster. Slightly screw bolts in corbels
- 3. Fix straps to the front axle beam apertures.
- Put the front part of the skid plate on mounted bolts, then fix the rear part of the skid plate to mounted straps.
- 5. Tighten all screw joints.

